

CURRENT TRANSFORMER

Model 750-SD

Window Diameter 12.00"

**COTTON TAPE & VARNISH
DIPPED CONSTRUCTION**

APPLICATION:

Relaying

FREQUENCY:

50-400 Hz.

INSULATION LEVEL:

600 Volts, 10 kV BIL full wave.





- Terminals are 1/4-20 brass screws with one flatwasher, lockwasher and regular nut.

- Approximate weight 135 lbs.

REGULATORY AGENCY APPROVALS



Manufactured to meet the requirements of ANSI/IEEE C57.13.
Classified by U.L. in accordance with IEC 44-1

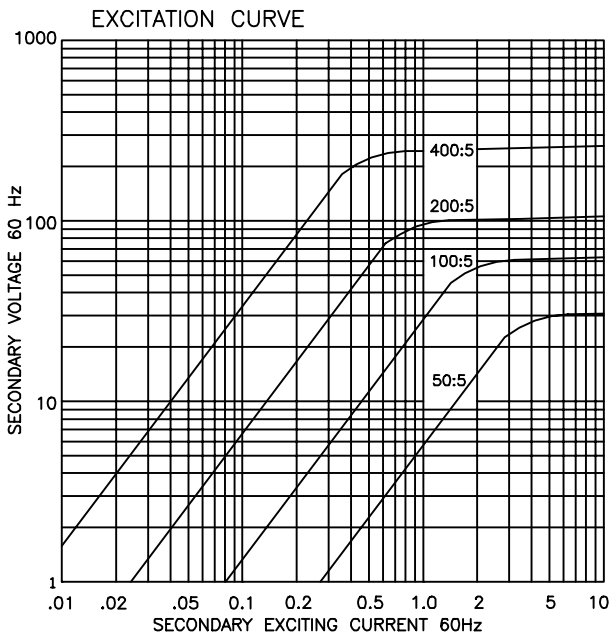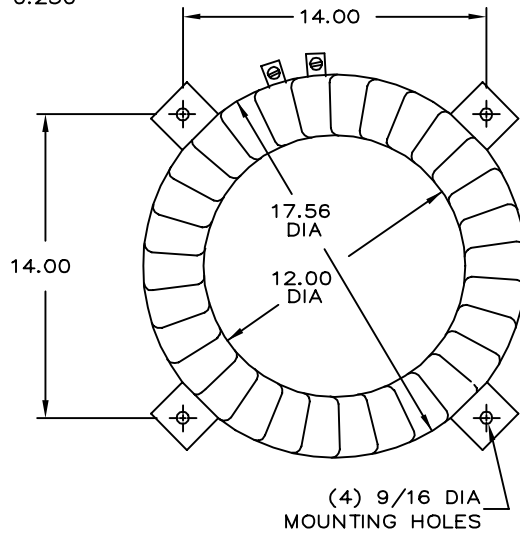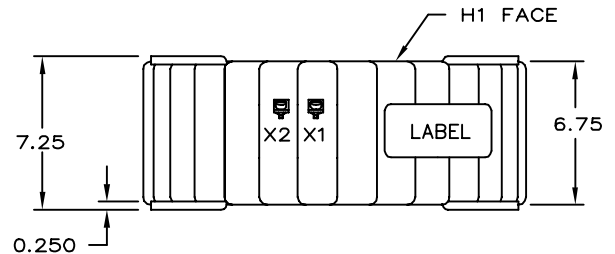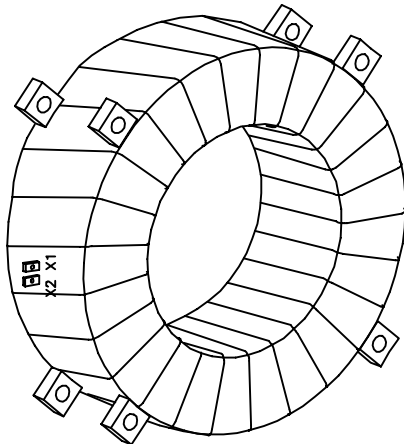

CATALOG NUMBER	CURRENT RATIO	RELAY CLASS	SECONDARY WINDING RESISTANCE (OHMS @ 75°C.)	CONTINUOUS THERMAL RATING FACTOR	
				@30°C	@55°C
750-SD-0121A13951-1	50:5	C20	0.026	2.0	2.0
750-SD-0121A13951-2	100:5	C50	0.051	2.0	2.0
750-SD-0121A13951-4	200:5	C100	0.103	2.0	2.0
750-SD-0121A13951-3	400:5	C200	0.205	2.0	2.0