## CURRENT TRANSFORMER

**Model 781** 

Window Diameter 6.50"

**APPLICATION:** 

Relaying and metering.

FREQUENCY:

50-400 Hz.

INSULATION LEVEL:
0.6 kV, BIL 10 kV full wave.
REGULATORY AGENCY APPROVALS





Manufactured to meet the requirements of ANSI/IEEE C57.13.
Classified by U.L. in accordance with IEC 44-1.


## CONTINUOUS THERMAL CURRENT RATING FACTOR:


2.0 at 30°C. amb., 1.5 at 55°C. amb.

- Secondary terminals are brass screws No. 10-32 with one flatwasher and lockwasher, accessible from either side.
- Approximate weight 31 lbs.

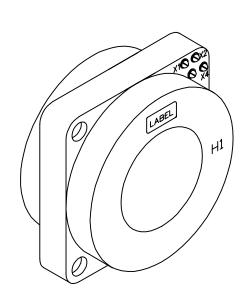

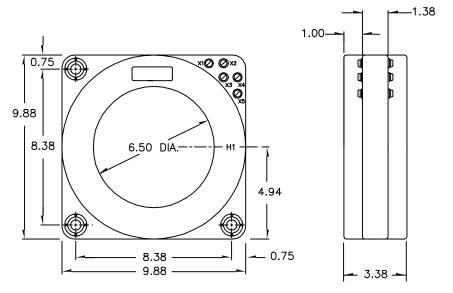

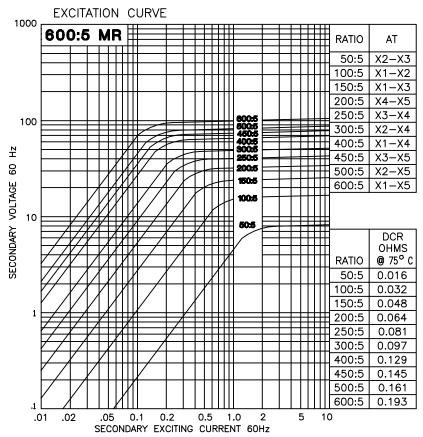

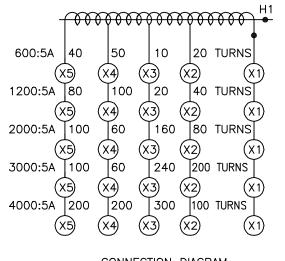

CONNECTION DIAGRAM

MODEL 781 - 601MR - rating C100

## TYPICAL EXCITATION CURVES - MODEL 781

