

CURRENT TRANSFORMER

Model 388MR

Window Diameter 5.75"

APPLICATION:
Relaying and metering.

FREQUENCY:
50–400 Hz.

INSULATION LEVEL:
0.6 kV, BIL 10 kV full wave.

REGULATORY AGENCY APPROVALS







Manufactured to meet the requirements of ANSI/IEEE C57.13.
Classified by U.L. in accordance with IEC 44-1

CONTINUOUS THERMAL CURRENT RATING FACTOR:


See TRF at curves.

- Secondary terminals are brass screws No. 10–32 UNF with one flatwasher and lockwasher.

- Approximate weight 35 lbs.

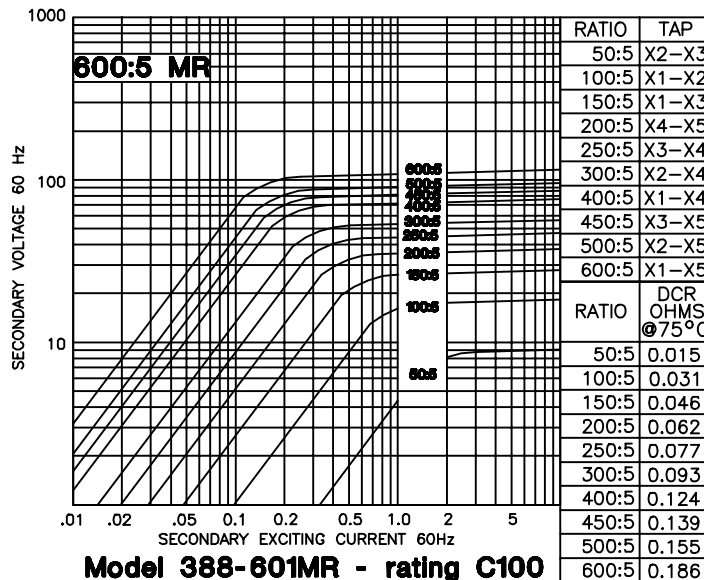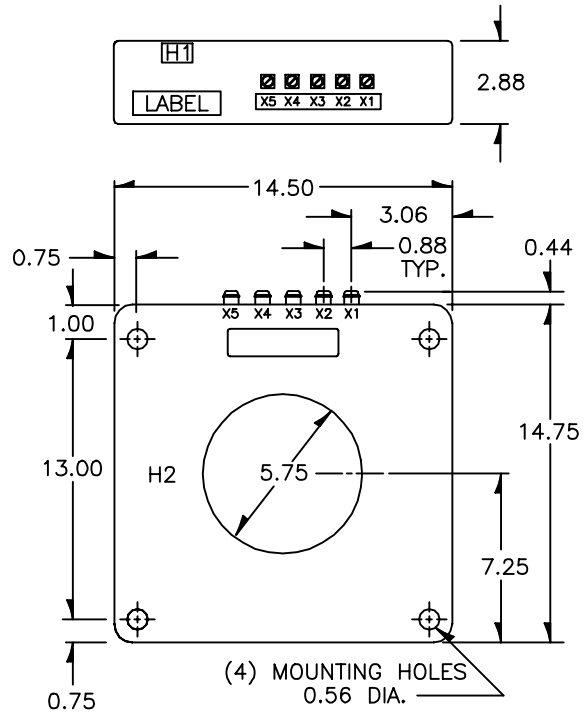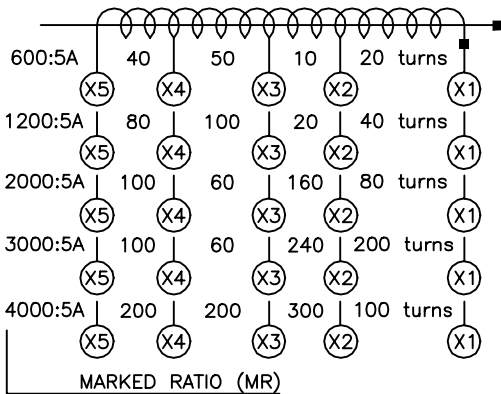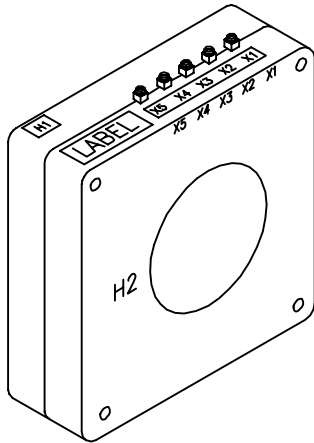


TRF= 2.0 @ 30°C, 2.0 @ 55°C amb.

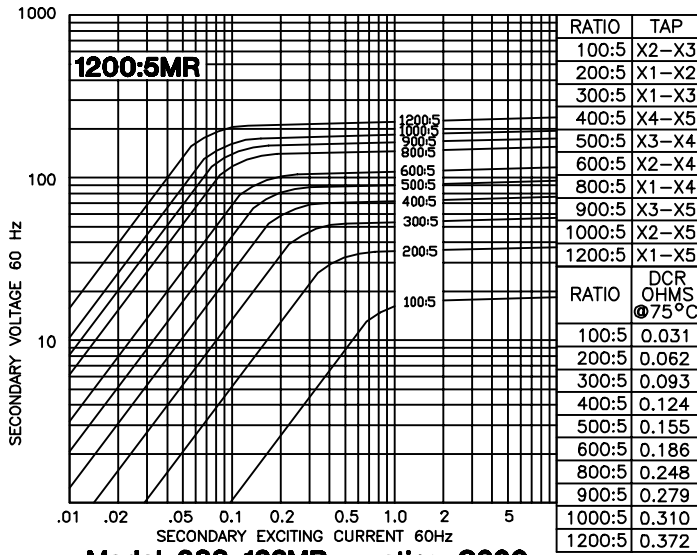


Model 388-122MR - rating C200

TRF= 2.0 @ 30°C, 1.5 @ 55°C amb.

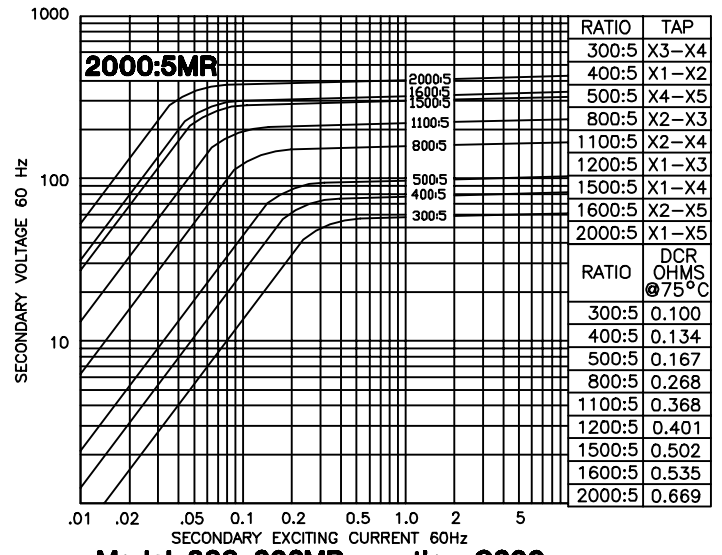


Model 388-202MR - rating C200

TRF= 1.5 @ 30°C, 1.33 @ 55°C amb.

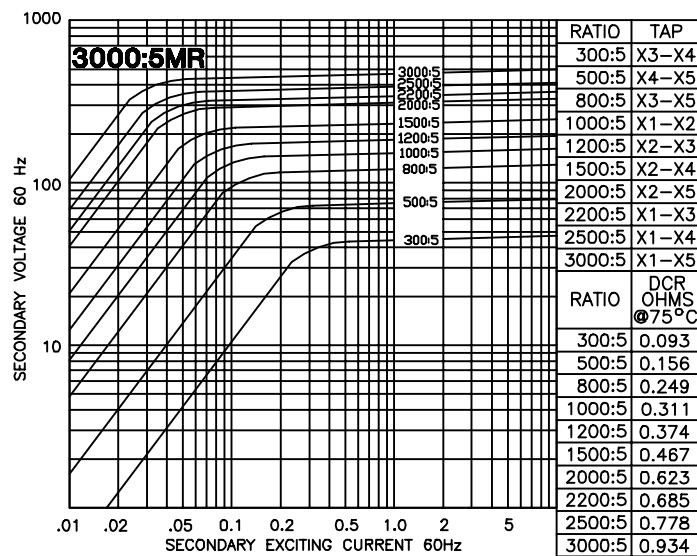

Model 388-302MR - rating C400

TRF= 1.5 @ 30°C, 1.0 @ 55°C amb.

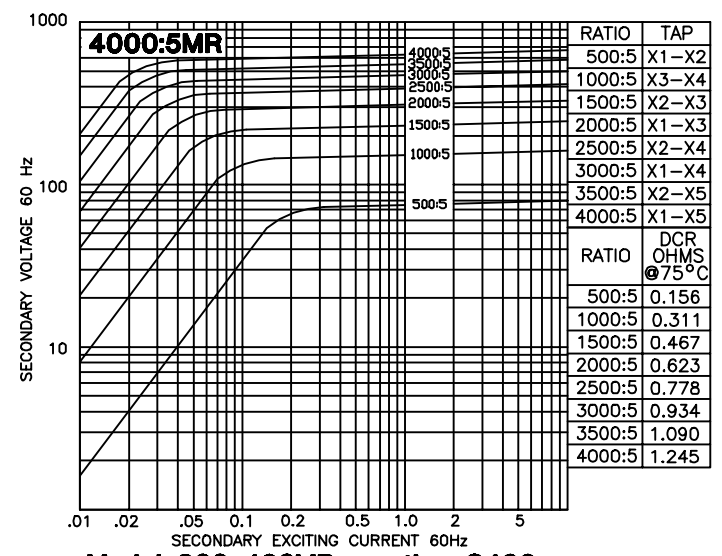

Model 388-402MR - rating C400

TRF= 1.33 @ 30°C, 1.0 @ 55°C amb.